



CLASSIC SERIES


CLASSIC 05/20/35/50



A non-reflective automotive window film with classic looks, it offers excellent privacy, 99% UV protection and up to 42% of Total Solar Energy Rejection.

TECHNICAL DATA	05	20	35	50
THICKNESS OF FILM (MIL)	1.5	1.5	1.5	1.5
% VISIBLE LIGHT TRANSMITTANCE	6	13	32	48
% VISIBLE LIGHT REFLECTANCE	4	5	5	6
% SOLAR TRANSMITTANCE	42	47	57	61
% SOLAR REFLECTANCE	6	6	6	5
% SOLAR ABSORBANCE	52	47	37	34
SHADING COEFFICIENT	0.64	0.69	0.77	0.76
% ULTRA VIOLET TRANSMITTANCE	<1	<1	<1	<1
% TSER	42	40	33	28
% GLARE REDUCTION	94	85	67	55

CONSTRUCTION

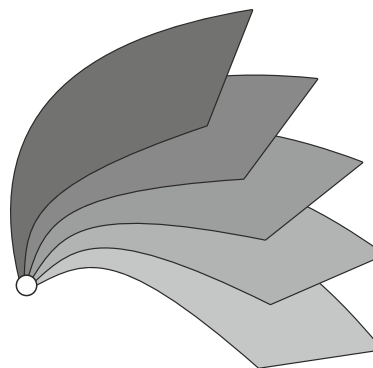

1. Hard coat scratch resistant layer
2. Clear high optical quality polyester
3. Standard dyed polyester
4. Pressure sensitive adhesive
5. Release liner

KEY BENEFITS

2PLY, Standard dyed

Classic black look

Non-reflective (no metal)

No signal interference with satellite radio, GPS, cellular and tire pressure monitoring systems

99% UV protection

Available in four shades

3 years limited warranty



www.motiva-windowfilms.com

Motiva Network • office@motiva-windowfilms.com