



# STD SILVER SERIES


STD SILVER 05/15/30



STD SILVER series are made by standard aluminium metallised polyester with a good durability, excellent heat rejection and high privacy from outside.

TECHNICAL DATA	05	15	30
THICKNESS OF FILM (MIL)	2	2	2
% VISIBLE LIGHT TRANSMITTANCE	5	15	31
% VISIBLE LIGHT REFLECTANCE	65	61	41
% SOLAR TRANSMITTANCE	8	11	27
% SOLAR REFLECTANCE	62	57	39
% SOLAR ABSORBANCE	30	32	34
SHADING COEFFICIENT	0.95	0.85	0.69
% ULTRA VIOLET TRANSMITTANCE	<1	<1	<1
% TSER	81	78	65
EMISSIVITY	0.64	0.69	0.72

## CONSTRUCTION

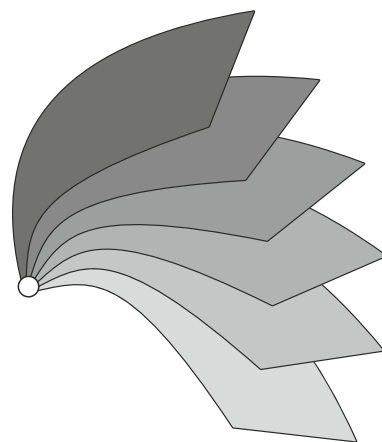

1. Premium hard coat scratch resistant layer
2. Clear optical polyester
3. Laminating adhesive with UV inhibitor
4. Aluminium metallised polyester
5. Pressure sensitive adhesive with UV inhibitor
6. Release liner

## KEY BENEFITS

Non fading standard metallised polyester

High heat rejection with low energy absorption

Excellent privacy, silver mirror look

99% UV protection

Available in three shades

Easy to install, interior application

7 years warranty, on vertical installation



[www.motiva-windowfilms.com](http://www.motiva-windowfilms.com)

Motiva Network • [office@motiva-windowfilms.com](mailto:office@motiva-windowfilms.com)